




STRATO[®]

CASHMERE & TAFFETA

EDITION
1.1

WALL FINISH PROFESSIONALS

TAIWAN • MALAYSIA • THAILAND

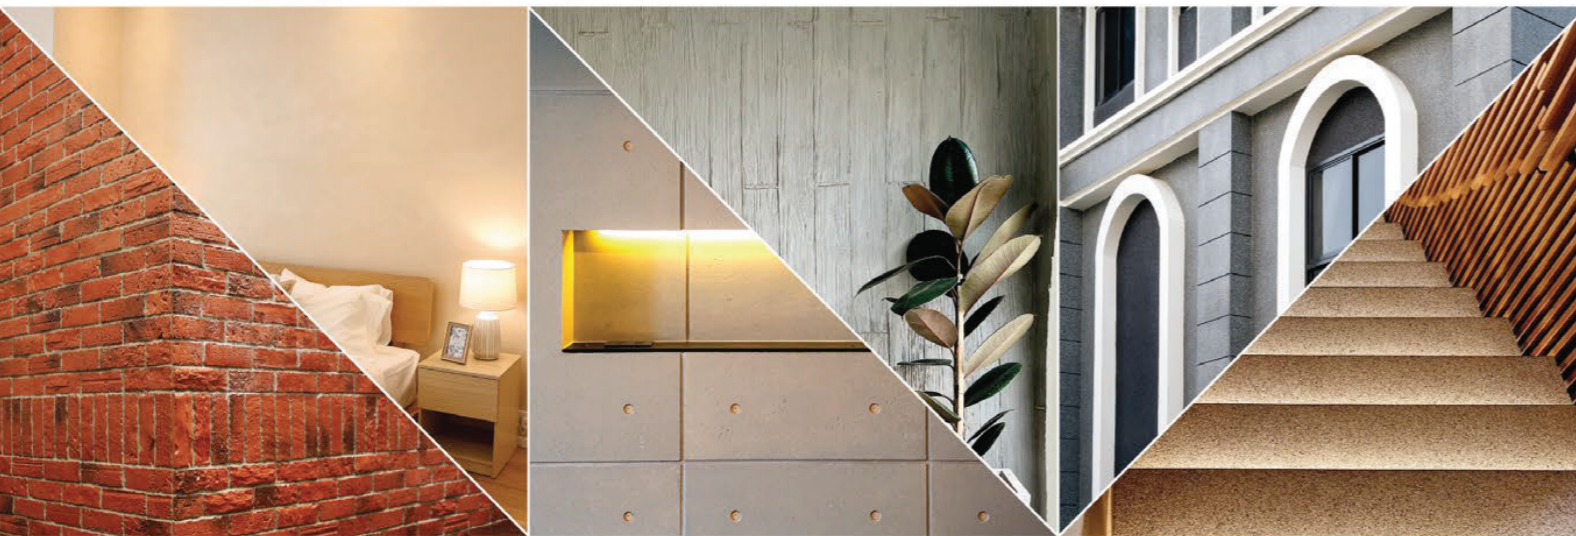

BRICK & STONE VENEER • TEXTURED PAINT • KASTPANEL • ECES • TEXTURE COATING • PEBBLE STONE COATING



Instagram and Facebook icons followed by [suzuka.group](https://www.suzuka.group)

Singapore Offices 62 Ubi Road 1, Oxley Bizhub 2, #01-41, Singapore 408734
20 Depot Lane #01-05, Singapore 109763
t. +65 6926 2610 m. +65 8788 6890 (WhatsApp only)

Malaysia Offices Unit A-01-24, Plaza Bukit Jalil (Aurora Place), No. 1, Persiaran Jalil 1, Bandar Bukit Jalil,
57000 Kuala Lumpur Malaysia
JB1: 6 Jalan Ekoperniagaan 1/28, Taman Ekoperniagaan, 81100 Johor Bahru, Johor, Malaysia
JB2: 27 Jalan Ekoperniagaan 2/7, Taman Ekoperniagaan, 81100 Johor Bahru, Johor, Malaysia
t. +60 7511 4788 m. +60 11 7019 0428 (WhatsApp only)



CASHMERE & TAFFETA-E1.1-2401

WALL FINISH
PROFESSIONALS.

SINCE
1977



Chimmery
INTERIOR
TEXTURED PAINTS

* Photos of the products shown in this catalogue may vary in color due to lighting condition & printing. We suggest you examine actual product samples before ordering.

SUZUKA®
WALL SEALER PRO

“ Make your wall finishes last longer! ”

Packing Size: **1L 5L 20L**

Superior primer for concrete, skimmed or masonry surfaces.

This sealer that has good substrate penetration abilities to increase adhesion of product to prevent chalking or peeling off.

It has excellent alkaline resistance properties that can prevent efflorescence. It is an ideal base coat for any SUZUKA® or any wall finish products.

Coverage	Drying Time (hour)	
6.5 - 8.5 m ² /l/coat	Surface Dry : 1	Substrate Temperature:
	Hard Dry : 5	23°C - 26°C
	Recoating : 5	

Features:

- Excellent alkaline resistance to prevent efflorescence.
- Good for new walls and repainting.
- Prevents skim coat from chalking & peeling off.
- Extremely good penetration.
- Excellent adhesion.
- Exterior and interior use.
- Applicable with brush, roller or spray gun.

Suitable for:

- Masonry wall
- Brickwork
- Plaster
- Skimmed Coat
- Asbestos free substrate

Airless Spray

Nozzle	Spray Angle Degree	Pressure
1.8 - 2.0 mm	65° - 80°	210 psi/150kg/cm²



STRATO®
Cashmere

SCH

SCH 001 - 021

Strato® Cashmere embodies the pinnacle of elegance in textured coating. Achieved through smooth layering and delicate craftsmanship, the finished product gives a refined and royal appearance with a lingering hint of sophistication.

Appearance

Low Sheen ●●●●● High Sheen

Smooth Texture ●●●●● Rough Texture

Matte ●●●●● Metallic

Features

- Low VOC & Odor
- Green Choice, Water Based & Eco-friendly
- Formaldehyde & Lead Free
- Easy Application & DIY Friendly
- Applicable on Ceiling
- Easy Maintenance
- Slight Metallic Finish

• Interior use only



SCH-001 Pearl White



SCH-002 Silver Mist



SCH-003 Silver Slate



SCH-004 Platinum Metal



SCH-005 Bronze Age



SCH-006 Sand Castle Beige



SCH-007 Autumn Beige



SCH-008 Eggshell Beige



SCH-009 Desert Gold



Interior Design by
METRICS
GLOBAL

SCH-003 Silver Slate




SCH-016 Stardust Silver



SCH-008 Eggshell Beige

All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tone differences.

We highly recommend seeing actual samples before ordering.

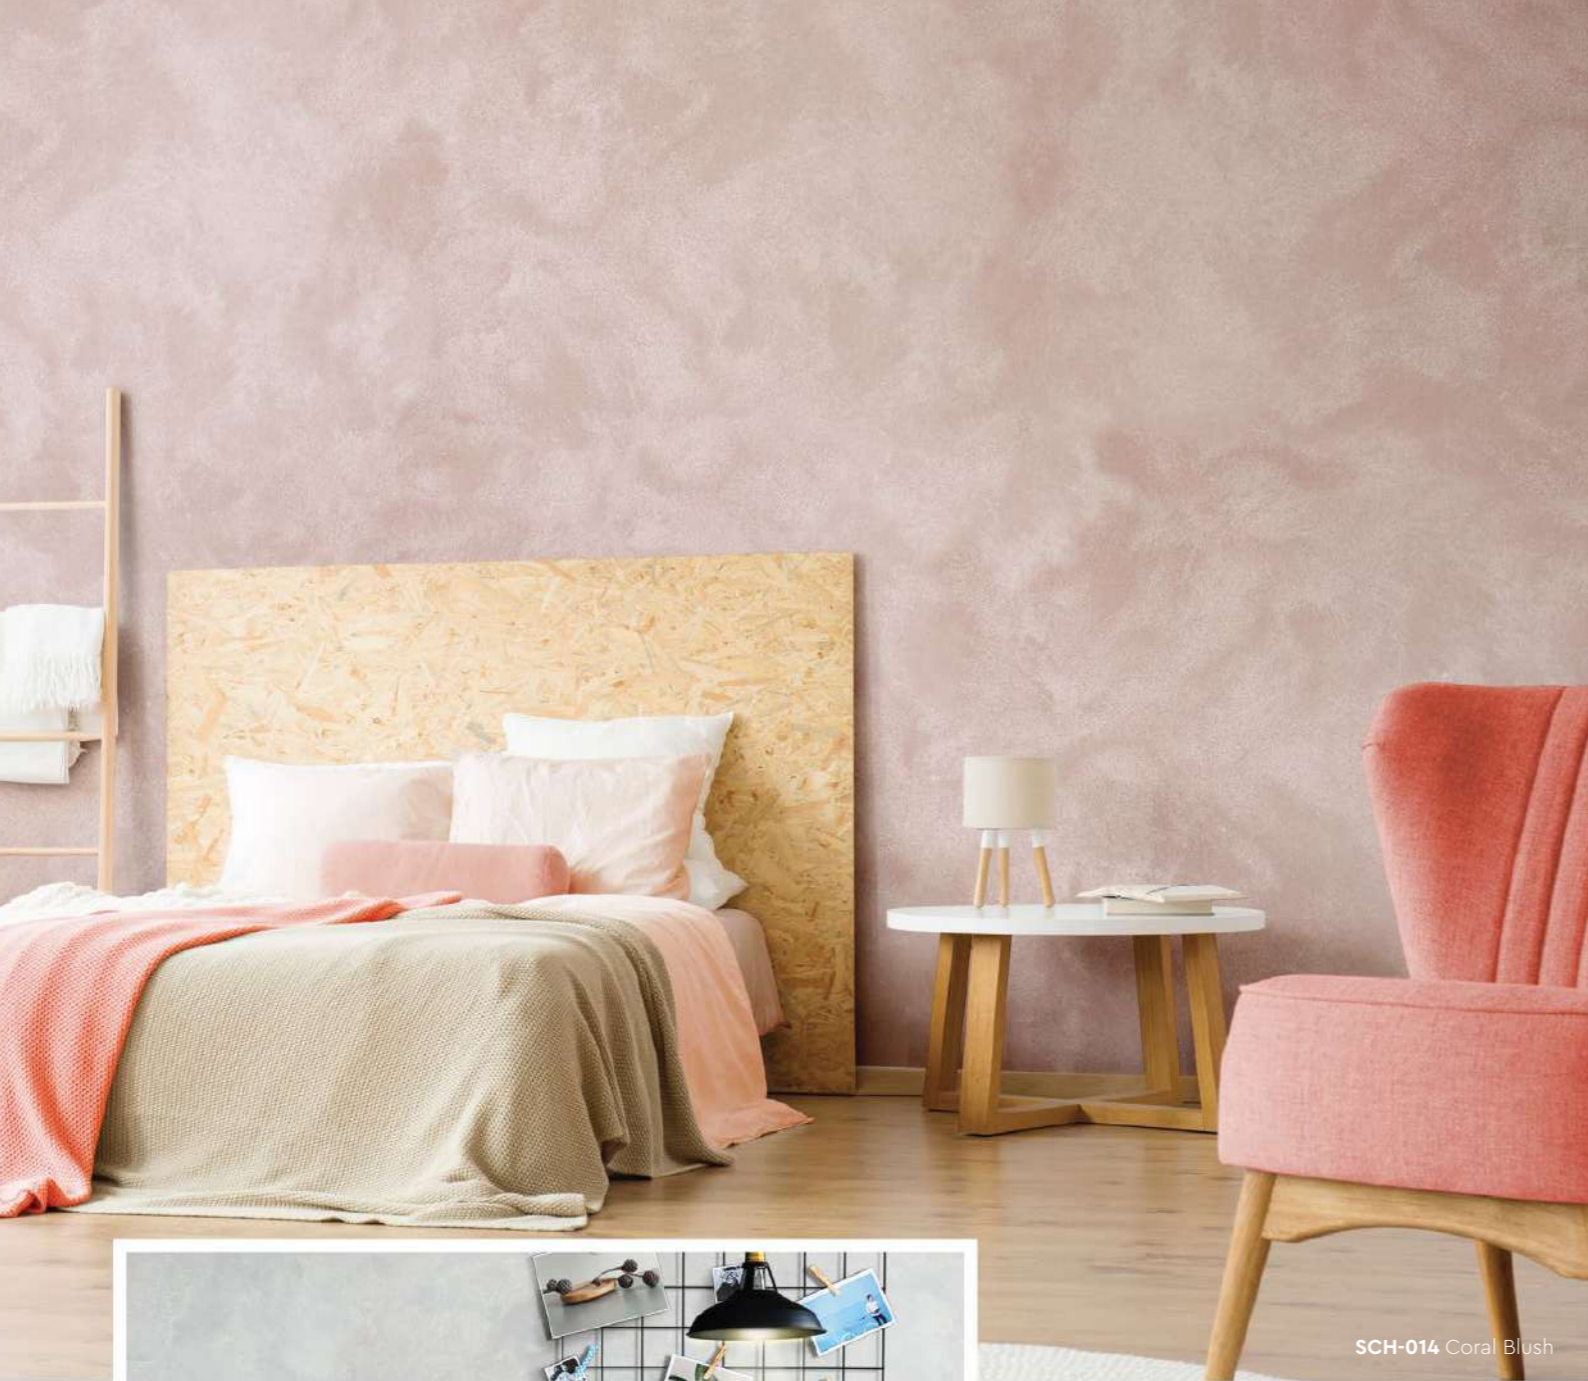

SCH-014 Coral Blush




SCH-015 Powder Blue

All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tone differences.

We highly recommend seeing actual samples before ordering.



SCH-010 Honey Yellow

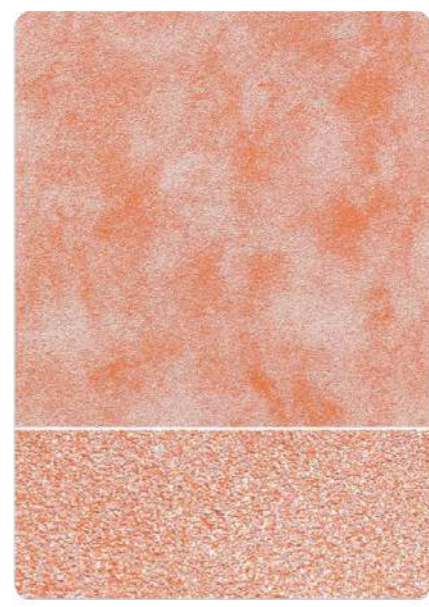

SCH-011 Peach Blossom



SCH-012 Plum Sunset



SCH-013 Baby Doll Pink



SCH-014 Coral Blush




SCH-015 Powder Blue



SCH-016 Stardust Silver



SCH-017 Lace blue

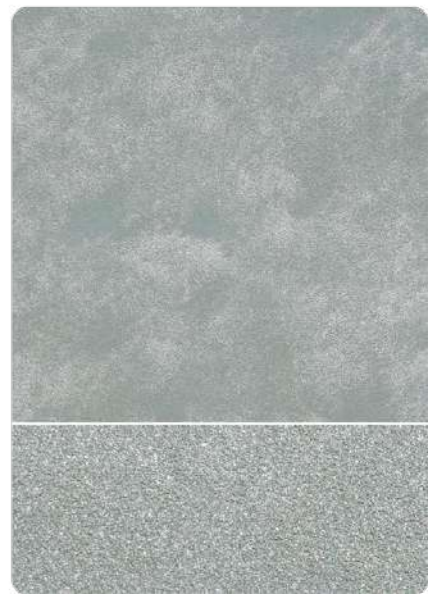

SCH-018 Ash Grey



SCH-006 Sand Castle Beige



SCH-019 Peacock Blue

Strato® Cashmere

Application Video

Application Technique



Preparation:

- Cover the edges of surface that won't be painted by masking it with tape, paper or plastic.
- Clean up the wall surface to ensure it is free from dirt and dust.



1 Primer

Roll 2 layers of primer on the entire surface. Allow 30 minutes to dry between the layers. (The primer can be diluted with maximum 5% of clean water)

Tool: Roller



2 Texture Coat

Brush on texture coat in criss cross patterns. Apply 1-2 layers. Ensure the whole surface area is covered.

Tool: Brush



3 Flattening

Flatten the entire surface in circular motion to enhance the pattern.

Tool: Plastic Scrapper




4 Topcoat

Evenly roll SR-Top 3 on entire surface. Allow to dry for 1 hour.

Tool: Roller

IMPORTANT:

Color may vary on application technique & amount of material used.

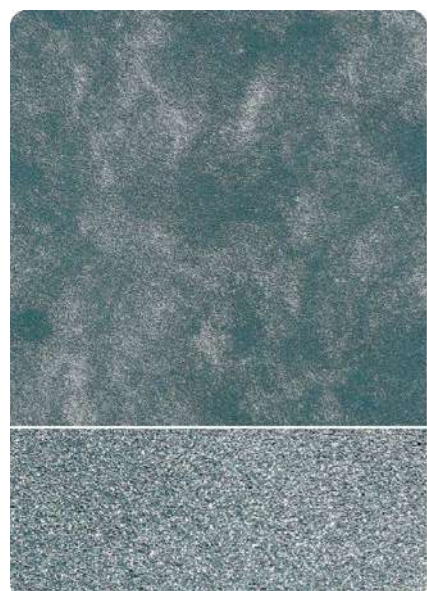

SCH-019 Peacock Blue



SCH-020 Olive Tree



SCH-021 Tropical Garden



Packing Data

1 L	Primer
1 L	Texture Coat
1 L	Topcoat (SR-Top 3)

Coverage (per set)

WALL	6 - 7 sqm
CEILING	5 - 6 sqm



Tools: Roller, Brush & Plastic Scrapper

STRATO®
Taffeta

SRT

SRT 201 - 233

A vibrant color layered in texture and dusted with a shimmering pearl effect crafts a bold and radiant feel onto the wall.

Appearance

Low Sheen	● ● ● ● ●	High Sheen
Smooth Texture	● ● ● ● ●	Rough Texture
Matte	● ● ● ● ●	Metallic

Features



Low VOC & Odor



Green Choice, Water Based & Eco-friendly



Formaldehyde & Lead Free



Easy Application & DIY Friendly



Applicable on Ceiling



Easy Maintenance



Shimmering Finish

• Interior use only



SRT-201 Pewter Grey



SRT-203 Light Steel Blue



SRT-209 Light Sephia



SRT-214 Light Sapphire



SRT-219 Oyster Beige



SRT-225 Blue Waves



SRT-231 Malted Mocha



SRT-232 Pale Lavender



SRT-233 Ocean Surface



SRT-201 Pewter Grey



SRT-214 Light Sapphire



SRT-203 Light Steel Blue

All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tonne differences.

We highly recommend seeing actual samples before ordering.



SRT-232 Pale Lavender

Strato® Taffeta

Application Video

Application Technique



Preparation:


- Cover the edges of surface that won't be painted by masking it with tape, paper or plastic.
- Clean up the wall surface to ensure it is free from dirt and dust.



1 Primer

Roll 2 layers of primer on the entire surface. Allow 30 minutes to dry between the layers. (The primer can be diluted with maximum 5% of clean water)

Tool: Roller



2 Sanding (Optional)

Sand the entire surface in circular motion to ensure the surface is smooth.

Tool: 600 Grit Sand Paper



3 Texture Coat

Scrape texture coat in a random criss cross pattern. 2-3 layers. Every layer requires 30 minutes to dry.

Tool: Stainless Steel Scrapper



4 Sanding

Sand the entire surface in circular motion to enhance the pattern.

Tool: 600 Grit Sand Paper



5 Topcoat

Scrape on topcoat SR-Top 2 in a random criss cross overlapping patterns. Allow 1 hour to dry.

Taffeta has a **shimmering** pearl effect topcoat. For a **matte** finishing, please request **SR-Top 1**.

Tool: Stainless Steel Scrapper

IMPORTANT:
Color may vary on application technique & amount of material used.




Packing Data

1 L	Primer
1 L	Texture Coat
0.5 L	Topcoat (SR-Top 2)

Coverage (per set)

WALL	4.5 sqm
CEILING	3.5 sqm

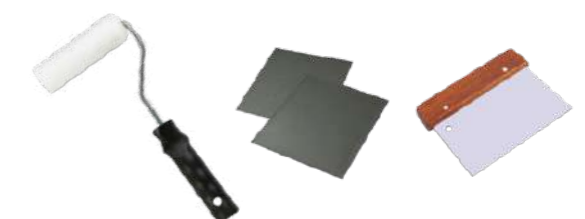

Tools: Roller, Sand Paper (600 Grit) & Stainless Steel Scrapper.