

INTERIOR TEXTURE PAINT COLLECTION

## WALL FINISH PROFESSIONALS

TAIWAN • MALAYSIA • THAILA



BRICK & STONE VENEER . TEXTURE PAINT . KASTPANEL . ECES . TEXTURE COATING . PEBBLE STONE COATING



Singapore Offices 62 Ubi Road 1, Oxley Bizhub 2, #01-41, Singapore 408734

20 Depot Lane #01-05, Singapore 109763

t. +65 6926 2610 m. +65 8788 6890 (WhatsApp only)

Malaysia Offices

Unit A-01-24, Plaza Bukit Jalil (Aurora Place), No. 1, Persiaran Jalil 1, Bandar Bukit Jalil, 57000 Kuala Lumpur Malaysia

6 Jalan Ekoperniagaan 1/28, Taman Ekoperniagaan, 81100 Johor Bahru, Johor, Malaysia

JB2: 27 Jalan Ekoperniagaan 2/7, Taman Ekoperniagaan, 81100 Johor Bahru, Johor, Malaysia t. +60 7511 4788 m. +60 11 7019 0428 (WhatsApp only)





STRATO-E6-2210

\* Photos of the products shown in this catalogue may vary in color due to lighting condition & printing. We suggest you examine actual product samples before ordering.





# Strato. CEMENT TEXTURE

Create everlasting look with Strato® Cement Texture. Whether you are going for the industrial, scandinavian, contemporary or minimalistic style, the backdrop of the cement texture can complete the look.



• INTERIOR USE ONLY
For exterior options, please see MONOKRETE.



Featurey

Crack Resistant



Low VOC & Odor



Formaldehyde & Lead Free



Green Choice, Water Based & Eco-friendly



Easy Application & DIY Friendly

Anti-chalking & Efflorescence



Applicable on Ceiling



Easy Maintenance



Easy to Touch Up



Matte Finishing
















Granite Grey | **SCT-304** 







Charcoal Grey | **SCT-306** 



Metal Grey | SCT-307



Shadow Grey | SCT-308

## **CEMENT TEXTURE** SCT-309 ASHES GREY SCT-309 Ashes Grey | SCT-309 ASHES GREY Misty Grey | SCT-310

## APPLICATION TECHNIQUE





#### **PRIMER**

Roll 2 layers of primer on the entire surface. Allow 30 minutes to dry between the layers.

(The primer can be diluted with maximum 5% of clean water)

Tool: Roller



#### **SANDING**

Sand the entire surface in circular motion to ensure the surface is smooth.

Tool: 600 Grit Sand Paper



#### **TEXTURE COAT**

Scrape texture coat randomly to create pattern. Ensure the whole surface area is covered. Then apply second layer.

Tool: Stainless Steel Trowel



#### **SANDING** (OPTIONAL)

Sand the entire surface in circular motion to enhance the pattern.

( Tool: 600 Grit Sand Paper )



#### **TOPCOAT**

Apply SR-Top 1 on entire surface using a dry sponge in circular motions.


**IMPORTANT:** Use a clean and dry sponge or cleaning cloth to wipe the excess topcoat before it dries to avoid the sponge marks.


Tool: Sponge / Cleaning Cloth



**IMPORTANT:** Color may vary on application technique & amount of material used.







Sponge / Cleaning Cloth

## PACKING **DATA**

1L	Primer	
1 L	Texture Coat	
0.5 L	Topcoat (SR-Top 1)	
Coverage (per set)		
WALL	<b>6 - 7</b> sqm	

**5 - 6** sqm

CEILING







Feature





Low VOC & Odor



Formaldehyde & Lead Free



Green Choice, Water Based & Eco-friendly



Easy Application & DIY Friendly

Anti-chalking & Efflorescence



Applicable on Ceiling



Easy Maintenance




Easy to Touch Up



Matte Finishing





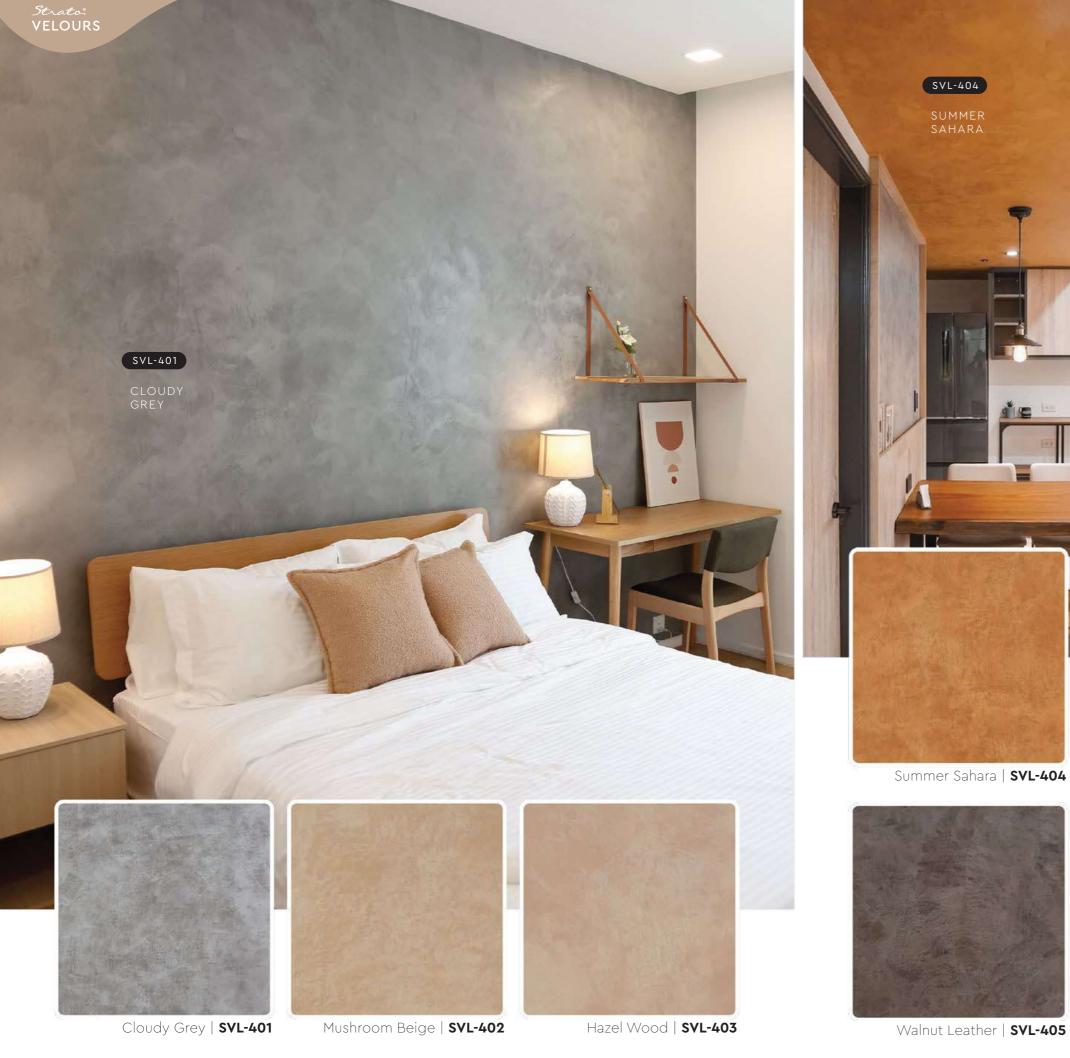



Brocade Blue | **SVL-406** 









Frosted Mint | SVL-411

Vivid Emerald | **SVL-412** 





Hunter Green | **SVL-413** 


Herbal Garden | **SVL-414** 



Deep Marine | **SVL-407** 

Royal Denim | SVL-408



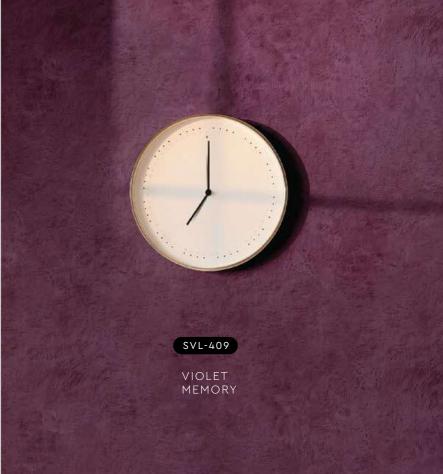

Violet Memory | **SVL-409** 

Rosy Mauve | SVL-410

## SVL-417 VANILLA CREAM Lime Mist | SVL-415 Flamingo Blush | **SVL-416**

#### Vanilla Cream | SVL-417

### APPLICATION TECHNIQUE





#### **PRIMER**

Roll 2 layers of primer on the entire surface. Allow 30 minutes to dry between the layers.

(The primer can be diluted with maximum 5% of clean water)

Tool: Roller



#### **SANDING**

Sand the entire surface in circular motion to ensure the surface is smooth.

Tool: 600 Grit Sand Paper



#### **TEXTURE COAT**

Scrape texture coat randomly to create pattern. Ensure the whole surface area is covered. Then apply second layer.

Tool: Stainless Steel Trowel



#### **SANDING** (OPTIONAL)

Sand the entire surface in circular motion to enhance the pattern.

( Tool: 600 Grit Sand Paper )



#### **TOPCOAT**

Apply SR-Top 1 on entire surface using a dry sponge in circular motions.

**IMPORTANT:** Use a clean and dry sponge or cleaning cloth to wipe the excess topcoat before it dries to avoid the sponge marks.


Tool: Sponge / Cleaning Cloth



**IMPORTANT:** Color may vary on application technique & amount of material used.







Sand Paper (600 Grit) Sponge / Cleaning Cloth

## PACKING **DATA**

1L	Primer	
1L	Texture Coat	
0.5 L	Topcoat (SR-Top 1)	
Coverage (per set)		
WALL	<b>6 - 7</b> sqm	
CEILING	<b>5 - 6</b> sqm	



All color shown are as close to the actual SUZUKA® Strato® colors as modern printing techniques permit. Color appearance/finishing may vary according to amount of coats, style of strokes applied and individual painting methods.



Features
Low VOC & Odor (1)1



Formaldehyde & Lead Free



Green Choice, Water Based & Eco-friendly





Easy, Quick Application & DIY Friendly



Easy Maintenance



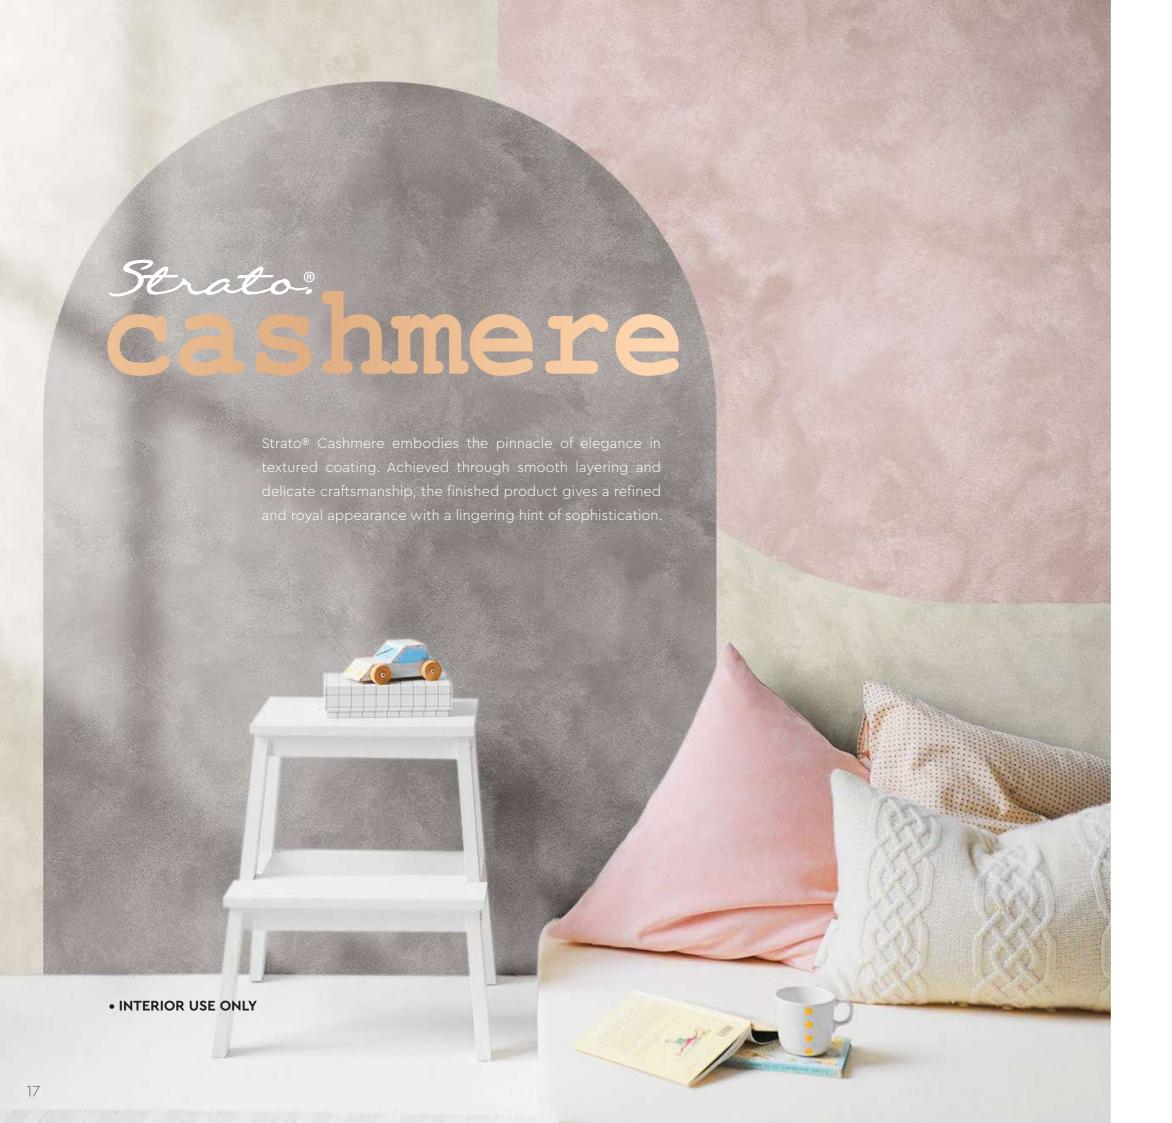


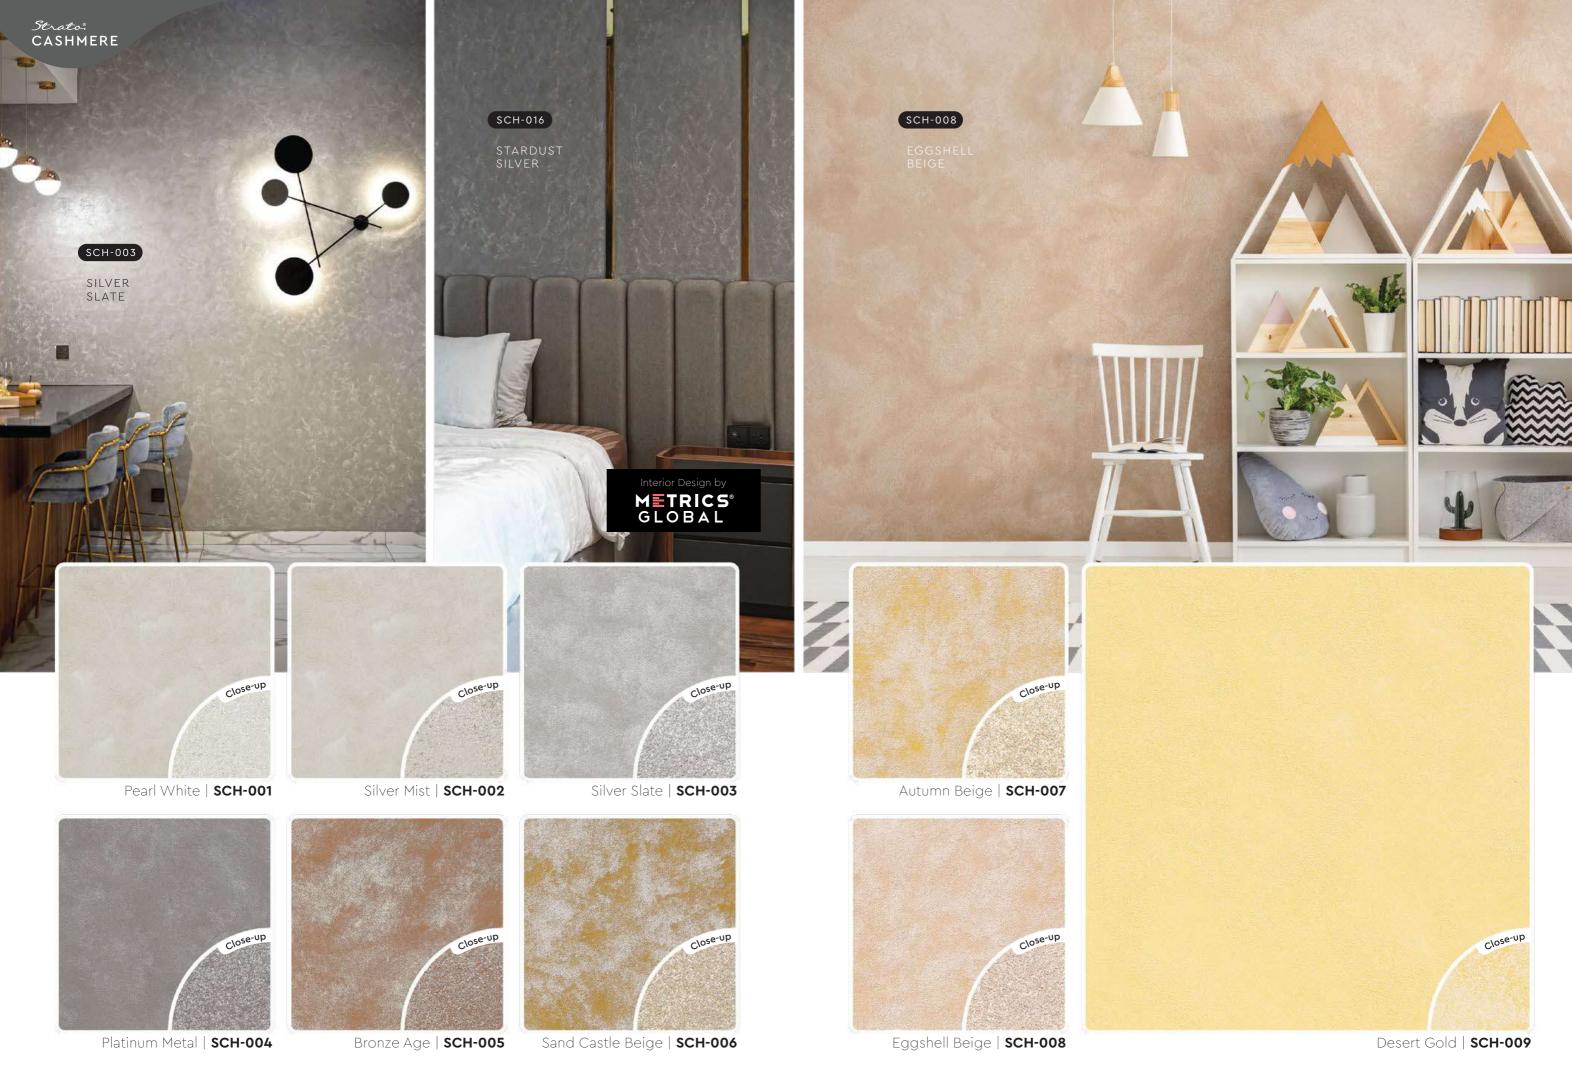












Baby Doll Pink | SCH-013







Powder Blue | SCH-015

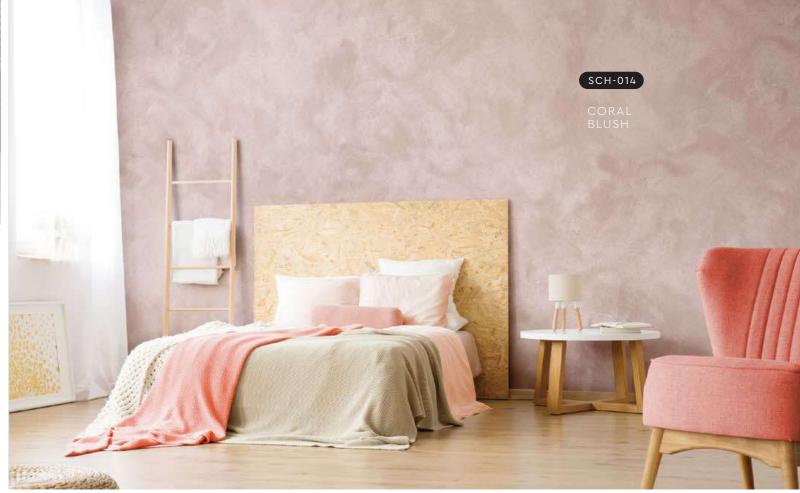

## CASHMERE SCH-019 PEACOCK BLUE Close-up Stardust Silver | **SCH-016** Lace Blue | SCH-017 Ash Grey | SCH-018 Close-up Peacock Blue | SCH-019 Olive Tree | SCH-020 Tropical Green | SCH-021

## APPLICATION TECHNIQUE





#### **PRIMER**

Roll 2 layers of primer on the entire surface. Allow 30 minutes to dry between the layers.

(The primer can be diluted with maximum 5% of clean water)

Tool: Roller



#### **TEXTURE COAT**

Brush on texture coat in criss cross patterns. Apply 1–2 layers. Ensure the whole surface area is covered.

Tool: Brush



#### **FLATTENING**

Flatten the entire surface in circular motion to enhance the pattern.

( Tool: Plastic Scrapper



#### **TOPCOAT**

Evenly roll SR-Top 3 on entire surface. Allow to dry for 1 hour.

( Tool: Roller





PACKING **DATA** 

1 L	Primer
1 L	Texture Coat
1 L	Topcoat (SR-Top 3)

Coverage (per set)		
WALL	<b>6 - 7</b> sqm	
CEILING	<b>5 - 6</b> sqm	



## Strato: taffeta

A vibrant color layered in texture and dusted with a shimmering pearl effect crafts a bold and radiant feel onto the wall.



Low VOC & Odor



Formaldehyde & Lead Free



Green Choice, Water Based & Eco-friendly




Easy, Quick Application & DIY Friendly



Easy Maintenance



• INTERIOR ONLY

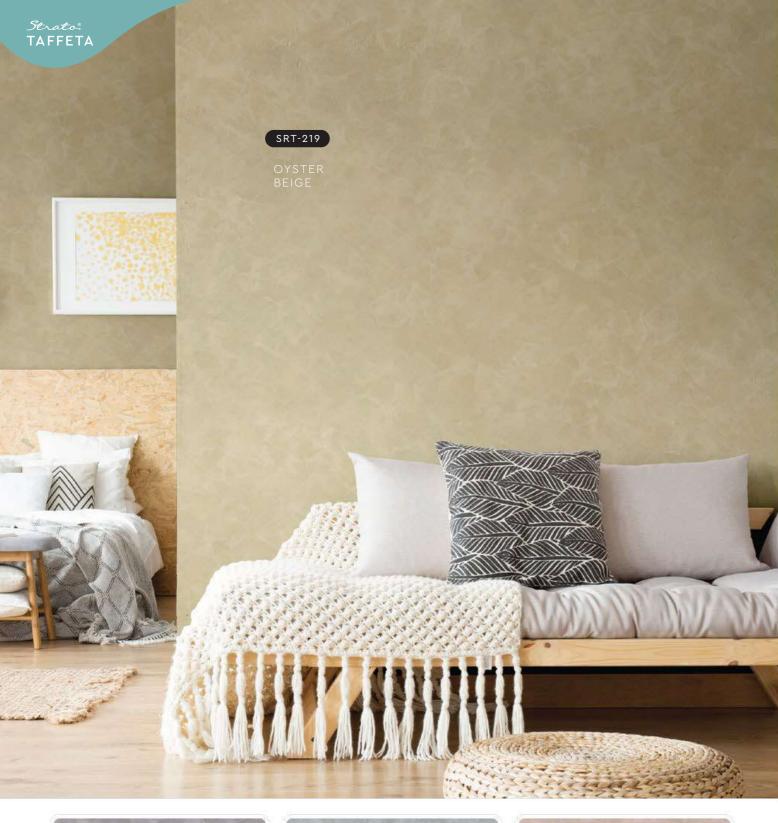









Light Sapphire | SRT-214





Oyster Beige | SRT-219





Pewter Grey | SRT-201

Light Steel Blue | SRT-203



## APPLICATION TECHNIQUE





#### **PRIMER**

Roll 2 layers of primer on the entire surface. Allow 30 minutes to dry between the layers.

(The primer can be diluted with maximum 5% of clean water)

Tool: Roller



#### SANDING (OPTIONAL)

Sand the entire surface in circular motion to ensure the surface is smooth.

Tool: 600 Grit Sand Paper



#### **TEXTURE COAT**

Scrape texture coat in a random criss cross pattern. 2–3 layers. Every layer requires 30 minutes to dry.

Tool: Steel Scrapper



#### **SANDING**

Sand the entire surface in circular motion to enhance the pattern.

Tool: 600 Grit Sand Paper



#### **TOPCOAT**

Scrape on topcoat SR-Top 2 in a random criss cross overlapping patterns. Allow 1 hour to dry.

Tool: Steel Scrapper

Taffeta has a **shimmering** pearl effect topcoat. For a **matte** finishing, please request **SR-Top 1**.









Sand Paper (600 Grit)



Malted Mocha | SRT-231



Pale Lavender | SRT-232



Ocean Surface | SRT-233

## PACKING **DATA**

1L	Primer	
1L	Texture Coat	
0.5 L	Topcoat (SR-Top 2)	
Coverage (per set)		
WALL	<b>4.5</b> sqm	
CFILING	<b>3.5</b> sgm	

